

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 February 2004 (12.02.2004)


PCT

(10) International Publication Number  
WO 2004/013437 A1

- (51) International Patent Classification<sup>7</sup>: E05C 3/12 (71) Applicant (for all designated States except US): YARRA RIDGE PTY LTD [AU/AU]; 8 Ross Street, South Melbourne, Victoria 3205 (AU).
- (21) International Application Number: PCT/AU2003/000984 (72) Inventor; and
- (22) International Filing Date: 5 August 2003 (05.08.2003) (75) Inventor/Applicant (for US only): WATTS, John, Russell [AU/AU]; 61 St. Vincent Place, Albert Park, Victoria 3206 (AU).
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data:  
2002950607 5 August 2002 (05.08.2002) AU  
2002952981 28 November 2002 (28.11.2002) AU  
2002953379 17 December 2002 (17.12.2002) AU  
2003900725 19 February 2003 (19.02.2003) AU  
2003902294 13 May 2003 (13.05.2003) AU

[Continued on next page]

(54) Title: A PIVOTAL BOLT

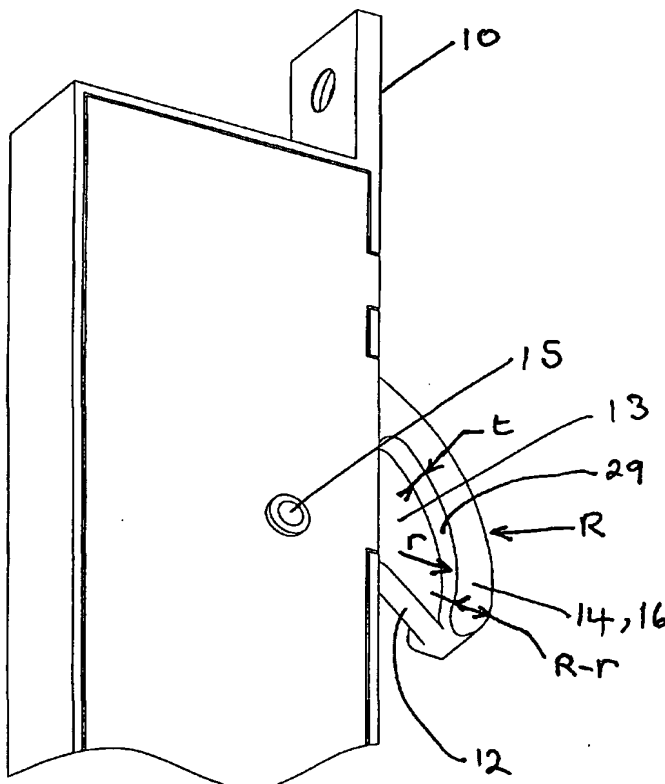

(57) Abstract: A lock for a displaceable wing(1) supported adjacent an opening (2) and having a closing edge (3) adjacent an element (4) defining the opening when the wing is closed; engageable means (5) mountable to the opening and including an entry aperture (6) connected to an offset aperture (7) of reduced width; a lock body mountable to the wing and including a casing (9) defined in part by a front edge (10) and an angularly displaceable bolt (11) having a leading edge (12) and at least one relatively protruding side shoulder (14), said bolt being displaceable about an axis orthogonal to the face of the wing and protruding from the front edge to engage the engageable means, said engagement being between the side shoulder (14) and the offset aperture which restrains the bolt and engageable means against relative displacement in a horizontal direction both parallel and orthogonal to the face of the wing.

WO 2004/013437 A1